

# O6P400



## Retro-reflective sensor

O6P-FPKG/AS/4P



- 1: output function switch  
2: potentiometer sensitivity



### Product characteristics

Type of light	red light
Housing	rectangular

### Application

System	polarization filter
Function principle	Retro-reflective sensor
Application	suited for use in the machine tool industry

### Electrical data

Operating voltage	[V]	10...30 DC
Current consumption	[mA]	12; ((24 V))
Protection class		III
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	633

### Outputs


Electrical design		PNP
Output function		light-on/dark-on mode; (selectable)
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	100
Switching frequency DC	[Hz]	1000
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)

# O6P400



## Retro-reflective sensor

O6P-FPKG/AS/4P

Monitoring range		
Range referred to prismatic reflector [m]	0.05...5; (Prismatic reflector Ø 80 E20005)	
Range adjustable	yes	
Max. light spot diameter [mm]	150	
Light spot dimensions refer to	at maximum range	
Polarization filter available	yes	
Operating conditions		
Ambient temperature [°C]	-25...60	
Protection	IP 65; IP 67; IP 68	
Tests / approvals		
EMC	EN 60947-5-2	
MTTF [years]	909	
UL approval	UL approval number	E010
Mechanical data		
Weight [g]	33.2	
Housing	rectangular	
Dimensions [mm]	41.3 x 13 x 21	
Material	housing: stainless steel (1.4404 / 316L); plastics: PPSU; sealing: FKM	
Lens material	PMMA	
Lens alignment	Side sensing	
Displays / operating elements		
Display	Switching status	1 x LED, yellow
	Power	1 x LED, green
Remarks		
Remarks	cULus - Class 2 source required	
Pack quantity	1 pcs.	
Electrical connection		
Connector: 1 x M8; coding: A		
		

# O6P400



## Retro-reflective sensor


O6P-FPKG/ASJ4P

### Connection



### Diagrams and graphs

excess gain graph

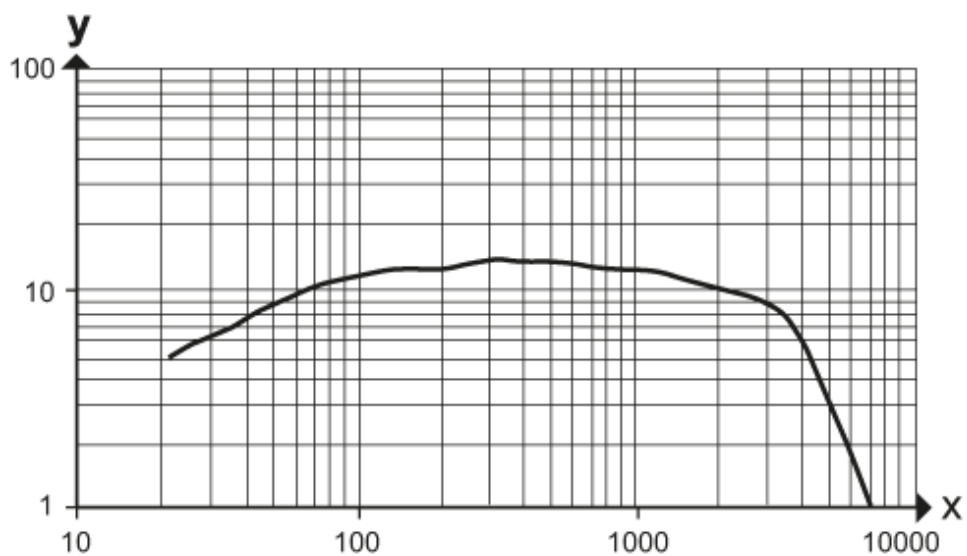

x: distance [mm]

y: excess gain factor